


Tower 11/12

MuteDesign®

EN Conditions for use

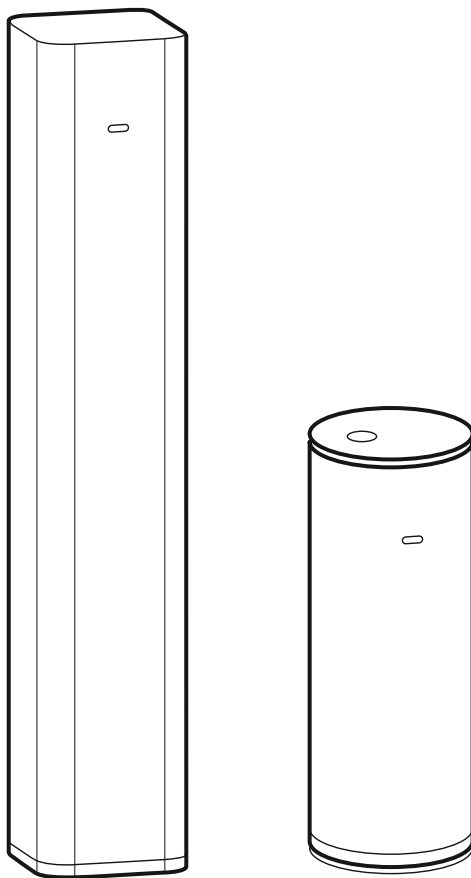

Usage instructions for the Tower

The **MuteDesign®** brand **Tower** is a high quality product which meets the customer's requirements not only in terms of functionality, but also in the aesthetics of their production.

In order to make the longest possible use of the Tower, please familiarise yourself with this information and the warranty terms before installing it.

Principles for proper use:

1. **Tower** products are intended solely for use in enclosed spaces. Ambient temperature between +15°C and +30°C.
2. The **Tower** may not be placed in the direct vicinity of heat sources, the product should be placed far from chimneys and electric heaters.
3. The product should not be used where there is a high degree of humidity, due to the absorbent structure of the foam from which it is made (humidity range 40 ÷ 60 %).
4. The **Tower** should avoid being exposed to long-term effects of sunlight, because otherwise discolourations could appear on the surface.
5. The **Tower** should not be additionally encumbered, hangers, shelves and other items should not be attached to it.
6. The foam from which the products are made may react with strong oxidising substances.
7. The **Tower** is vulnerable to mechanical damage, so special care should be taken not to damage the product with sharp tools.
8. The **Tower** may be fitted with a wooden worktop. Because wood is a natural material, there may be minor differences in the shades or grain pattern.

Cleaning and maintenance:

1. The product is very simple to keep clean. It should be vacuumed using a vacuum cleaner with a soft-hair attachment.
2. Remove stains and dirt from the fabric surface with a soft sponge dampened with water. More stubborn stains should be removed using a soft sponge with a delicate detergent such as washing up liquid. To be safe, the detergent should always be tested first on an invisible part of the product to check that it does not discolour the fabric. Excessive spot cleaning should be avoided in order not to leave marks of wear and tear. Strong detergents such as bleach, solvents, acids or alkalines should not be used.
3. The steel elements of the **Tower** are coated with powder paint, and should not be cleaned with solvents or other corrosive substances.
4. The wooden finishing should be dry dusted using delicate materials such as cotton. Solvents or other corrosive substances cannot be used. It is needed to protect against water spillages.

Tower 11/12